

How high can your yields go?



Control what you can:
Reduce seed costs and
get good stands every time with
Exapta products and expertise.

**2017 Catalog
&
Idea Book**

 **exapta**
solutions, inc.

Exapta—committed to your success

Exapta Solutions was created by farmers and agronomists to fulfill a need for better seeding technology and methods. Our products and educational efforts are brought to you by the people who live in your industry every day.

Exapta relies on the necessity-driven innovation of many farmers & researchers to find solutions for high-performance planting and production. To this day, Exapta's forte is understanding how plants grow, and how the no-till seed-installation process can be more effectively accomplished. We strive not to sell you some device, but to provide useful information to help you get the most from your seeding equipment—more acres, better emergence, higher yield, and greater profit. Once armed with knowledge, we hope you'll see the value and wisdom of our products.

 My primary occupation for the past 23 years has been crop consulting for no-till. Long before I founded Exapta Solutions, I was convinced of the value of low-disturbance no-till, and the need for accomplishing seed firming and furrow closing as discrete steps.

At Exapta Solutions, we strive to be your Number One source for top-shelf no-till seeding products and information. Thus, we'd like to share our 2017 Idea Book & Catalog which we hope you'll find filled with useful thoughts, and a resource you'll eagerly consult on your journey to still greater seeding success.



Matt Hagny, President

 Leah Lanie
Sales & Service Manager
leah.lanie@exapta.com

 Ethan Begle
Sales & Service
ethan.begle@exapta.com

 Cody Cole
Sales & Service
cody.cole@exapta.com

 Brian Volk
Sales & Service
brian.volk@exapta.com

 Derrick Aufdemberge
Tradeshow Representative

 Kelly Leon
Warehouse Manager



“I appreciate everything you and the Exapta guys do for us as we try to keep moving forward in no-till while fighting machinery that is still largely being designed for conventional or minimum-till.”

Dietrich Kastens, Herndon, KS.


“Thank you for the information and the service you provide!! It makes a difference!”

Clyde Strotheide, Carlyle, IL

Fundamentals of seed placement



Profits inside—install with care

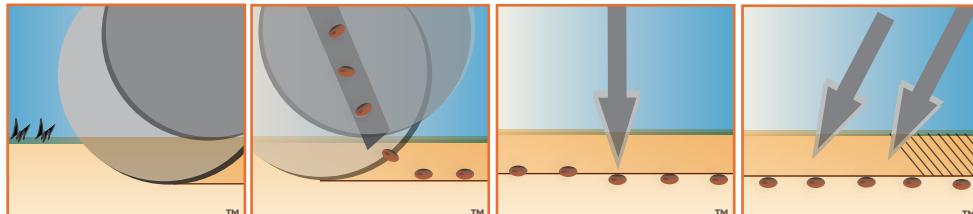

1 Cut residue & soil to create the furrow of the proper depth ™

2 Place the seeds consistently into the bottom of the furrow ™

3 Firm the seeds by applying the right amount of pressure exactly where it's needed ™

4 Close the furrow by chopping the sidewall, to prevent drying and allow good root exploration ™

Vigorous crops depend on you. In addition to controlling depth and spacing, your seeding equipment determines the uniformity of seed-to-soil contact and the condition of the soil placed over the seed. These influence the rate of air and water exchange during germination and early growth, as well as the resistance the seedling encounters during emergence and while developing roots.

Emergence, early growth, yield, and profit all hinge on proper seed placement—seeds are pressed (embedded) into the moist furrow bottom at a consistent depth, and the furrow sidewalls are shattered to cover seeds uniformly with loose fractured soil. With the seed securely firmed into the surrounding soil, it draws moisture easily for germination and establishment. Mulch cover prevents drying out of the seed zone prematurely. The Exapta No-till Planting System accomplishes these things most effectively.

“Loose material over the seed keeps the seed zone from drying, allows oxygen exchange, and encourages warming in the area where the growing point will occur.”



Dwayne Beck, PhD,
manager, Dakota Lakes
Research Farm

Read more by visiting www.exapta.com/working-knowledge/no-till-seed-placement

Perfect seed placement in no-till. Loose material over the seed is easily brushed away to reveal the seed embedded in the bottom of the furrow. The sidewalls created by the opener blades have been disrupted by the closing wheels, but the bottom of the furrow is undisturbed. Planter with 3.5mm opener blades, hardened seed-tube guards, Keetons, Mojo Wires, and Thompson closing wheels.



Tech tips for planters:

The planter toolbar and row units must run level (ignore the planter tongue's angle) with the terrain. Nose-down results in too little down-pressure available on the row units, and causes the closing brackets to be tipped incorrectly (lousy closing action), as well as the seed tube not being vertical enough. If in doubt, slightly nose-up is the lesser of the evils. (More on this in our DVD, p 27.)



Step 1, Cut: Avoid disturbing the path of the opener. If your planter has coulters, run them really shallow—like 6" above the soil! ☺ Fertilizer openers should run approx. 4" to the side, and no deeper than the seed openers (preferably shallower).

Row cleaners shouldn't move soil, and should only move a portion of the residue.

Opener blade flex results in a furrow of variable shape and depth, often with the lower portion becoming a pinched unusable slit (zero blade flex would create a 5/16-inch-wide furrow bottom on JD/Kinze/White planters). Blade flex can be reduced by replacing the 3mm disks with 3.5mm blades (already standard on some newer planters). Note that thicker disks cannot be shimmed as tightly together as the more flexible 3mm blades. Avoid 4mm blades—too blunt too quick. Heavy-duty bearings also reduce blade flex, but the seed-tube guard being up-to-spec is crucial. See p 5.

Step 2, Place: Sidewalls should remain intact until the seed is placed. Indented gauge tires (Reduced Inner Diameter) allow more lifting, which may adversely affect placement and firming. Use adequate down-pressure & frame weight (don't trust the monitor—dig).

Step 3, Firm: A separate firming device such as a Keeton (or Flo-Rite) is crucial, even with closing wheels that do a lot of packing (see p 8-9). Keetons & Flo-Rites should be set to the maximum tension, if adjustable. Keetons often need to be replaced annually, since the material weakens from sunlight and moisture. Check pressure by comparing the "snap" to a new firmer. The Mojo Wire provides up to 3x more pressure on a new Keeton or Flo-Rite—an advantage in nearly all no-till conditions.

Step 4, Close: Furrow closing should shatter both sidewalls, and cover the seed adequately and consistently: This requires 2 spoked wheels/row, since the furrow was created by openers prying the soil outward in both directions. To get maximum root development, both sidewalls must be chewed up by spoked closing wheels. Since the seed has already been firmed by the Keeton, it's desirable that the fill be loose, not packed. Thoroughly embedding the seed with a Mojo allows more aggressive crumbling of the sidewalls without pulling seeds loose.

Failure to break sidewalls adequately severely restricts roots. Crown roots—the main root system—must grow through the sidewall. If sidewalls are overpacked, 'rootless' or tomahawk roots are the result.




Valion™

seed tube guard

EXTREME DURABILITY

- Prevent blade flex**
- Avoid pinched furrows**
- Get consistent seed depth**
- Doesn't drag below blades**

Valion™ seed-tube guards will eliminate seed tube wear and greatly reduce blade flex to create a consistent furrow for improved planting depth control.

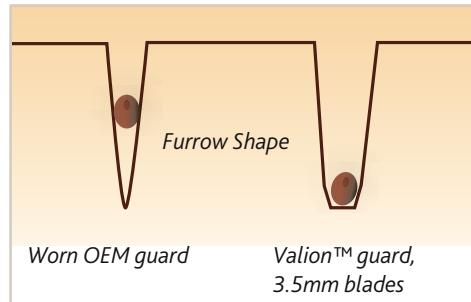

"The Valion works really well. I was wearing out factory guards every year and we don't farm that much. I checked the Valions after one year [2013] and they still looked like new. I recommend them to anyone having trouble, keep up the good work!"
[Those Valions were still good in 2016]

Ty Torkelson, Morris, IL
Exapta customer since 2013
(chrome Valions on 12-row JD 7200 planter)



"I ran 4 [competitor units: OEM guard with tube welded on] and 8 Valions. I will not ever use the [competitor guard] again. The Valions go on much easier, are sturdier, and I like the way they were set up to put on liquid fertilizer. The JD and [competitor] wear really fast and no longer function to hold the opening disks in alignment, and I've only had them on for 400 acres."

Kennley Wright, Colman, SD
Exapta customer since 2013
(12-row JD 7000)

"I am very pleased with the Valion performance. I get **consistent seed depth** and **therefore uniform emergence**. I am very happy with them! We are 100% no-till and double crop or cover crop everything."

Don Risser, Bainbridge, PA • Exapta customer since 2013 (Valions on 6-row JD 1750)

Chrome Alloy: 2x – 5x wear life of OEM



Valion (chrome alloy)

For Deere XP, pre-XP, ME5 (except ExactEmerge),
Kinze 2000 & 3000-series. See p 21 for details.

\$23.50–35.50

Lifetime durability with premium Valion™ Ultra with tungsten carbide inlays for a permanent fix.



Valion Ultra (tungsten carbide)

For Deere XP, pre-XP, ME5 (except ExactEmerge),
and Kinze 2000s & 4900s. See p 21 for details.

\$73.00–78.00

Lock seed in place with the Mojo Wire

"For my dollar, the Mojo Wire was the most effective product purchased for my planter. I get more uniform emergence due to better seed-to-soil contact."



Dean Stevens, Falls City, NE
Exapta customer since '08
(Mojo Wires on a 12-row Kinze 3650)

Ensures fast,
uniform
germination



*Keeton is a registered trademark of Precision Planting, Inc.

In loose tilled soil, planter "press" wheels could easily pack the soil from the surface all the way down to the seed. But this method is seriously flawed for no-till's firm (structured) soils, since enormous pressure must be applied at the surface to do any seed firming: Averaging 5 lbs of pressure at seed depth might require 50 to 150 lbs applied to a wheel at the surface, and certainly won't be consistent at seed depth. This severely packs the sidewalls and soil over the seed, to your detriment. Why not apply a precise pressure exactly where it's needed—at the seed's location?

The Keeton seed firmer was a good idea, but often isn't enough—applying only a few ounces to (at most) ~ 2 lbs of pressure. (Compare *in-furrow* 'seed-lock' wheels supplying 10 – 20 lbs of pressure on a similar surface area, precisely at the bottom of the furrow.) Furthermore, Keetons lose their tension fairly quickly. A new brand of sliding seed firmer, the Flo-Rites for 2014 had more pressure, but changed for 2015 & 2016 to have no more pressure than a Keeton.

The Mojo Wire solves this by supplying up to 3x more pressure to the Keeton or Flo-Rite. Customers are frequently amazed at the magnitude of improved germination—in higher percentages of seeds emerging, and in uniformity of timing of emergence. (An independent study in Illinois in 2011—the only independent study we know of—found a 6.4% increase in corn ear counts with Mojo Wires, and yield gains are often even greater in tough conditions—from our experience, and what customers report.) Plus, increased tension on the Keeton greatly reduces mud accumulation by creating self-cleaning scrubbing against the sidewalls.

Struggling to get good emergence with your planter in no-till? —Inadequate seed firming is often the culprit. Seeds should be securely embedded into the bottom of the furrow. You might be pleasantly surprised at how well your crops emerge with the Mojo Wire—you owe it to yourself to try them.



Ragged corn stand due to inadequate Keeton pressure: poor seed-to-soil contact, erratic emergence. Late-emerging plants are weeds.



Nearly perfect corn stand with Mojo Wires.
All plants are the same size.

"I wouldn't run Keetons without the Mojo Wires; in association with Valion seed-tube guards, spoked closing wheels with wedges and drag chains in our heavy black soils; **there is nothing that comes near them for even seed emergence.** Our sorghum and corn emergence was pretty fantastic again this year. I think the set up was about \$42(US)/row for the Keetons and Mojos—pretty cheap insurance considering corn seed here is \$340 per 72,000 seeds."

Cliff Weier, Dalby, Qld, Australia
Exapta customer since 2013
(13-row JD 1700-series on 40" spacing)

"We would not run without the Mojo Wires. They not only do an excellent job pushing the seed firmly into the trench, they also stop the Keetons from building up with mud. They are a 'must' on our farm."

Dan Forgey
Gettysburg, SD
Exapta customer since '06
(Mojo Wires & T-whls on 16-row JD 1700-series planter)




Uniform timing of emergence trumps uniform spacing for yield effect:

"Uniform emergence is even more critical as individual plant competition for resources becomes greater, such as **in droughty conditions.**"

Paul Jasa, planter & no-till expert,
Univ. of Neb.-
Lincoln



Numerous studies prove this. Indeed, loss from non-uniform *timing* of emergence is about **4x greater than uneven spacing.** (Full details at www.exapta.com/working-knowledge/library-links.) And when it comes to making sure all the seeds experience the same conditions (crucial for uniform timing of emergence), no one has emphasized this more than Exapta—everything we do is focused on improving seed placement.

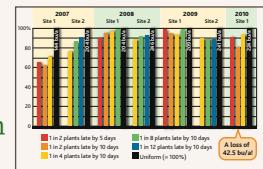

External routing of plastic tubing on Universal brackets makes life easier—if tethered in a particular way (see instructions online). Exapta now offers the little "holster" to keep tubing away from blades. See p 22.

"Without the Mojo Wires, I'd have fertilizer all over my closing wheels. So I knew the Keetons were riding out of the furrow—not firming the seeds. After I installed the Mojo Wires, they kept the Keetons down in the furrow and they were doing what they were actually designed to do. I was really happy with them."

John Ankerman
St. Marys, OH
Exapta customer
since 2016
(12-row JD 1770 NT)



The redesigned Quick Attach Keeton and Mojo Wire solve most of the problems associated with prior designs (including the Universal). See p 22.

Mojo Wire kits for Keetons & Flo-Rites (most planters)

\$11.00–23.00


See p 22 for details on various models

Keeton seed firmers (most planters)

\$34.00–35.00

Why spoked closing wheels?

Planters and drills were engineered for tilled seedbeds. For instance, smooth closing wheels **overpack** the furrow in no-till, especially when soils are damp—reducing emergence and hindering root penetration of the sidewall. With the soil structure of no-till, smooth wheels **struggle to close the furrow**. Spoked closing wheels first appeared in the early '90s with more designs being added each year. An honest assessment:[†]

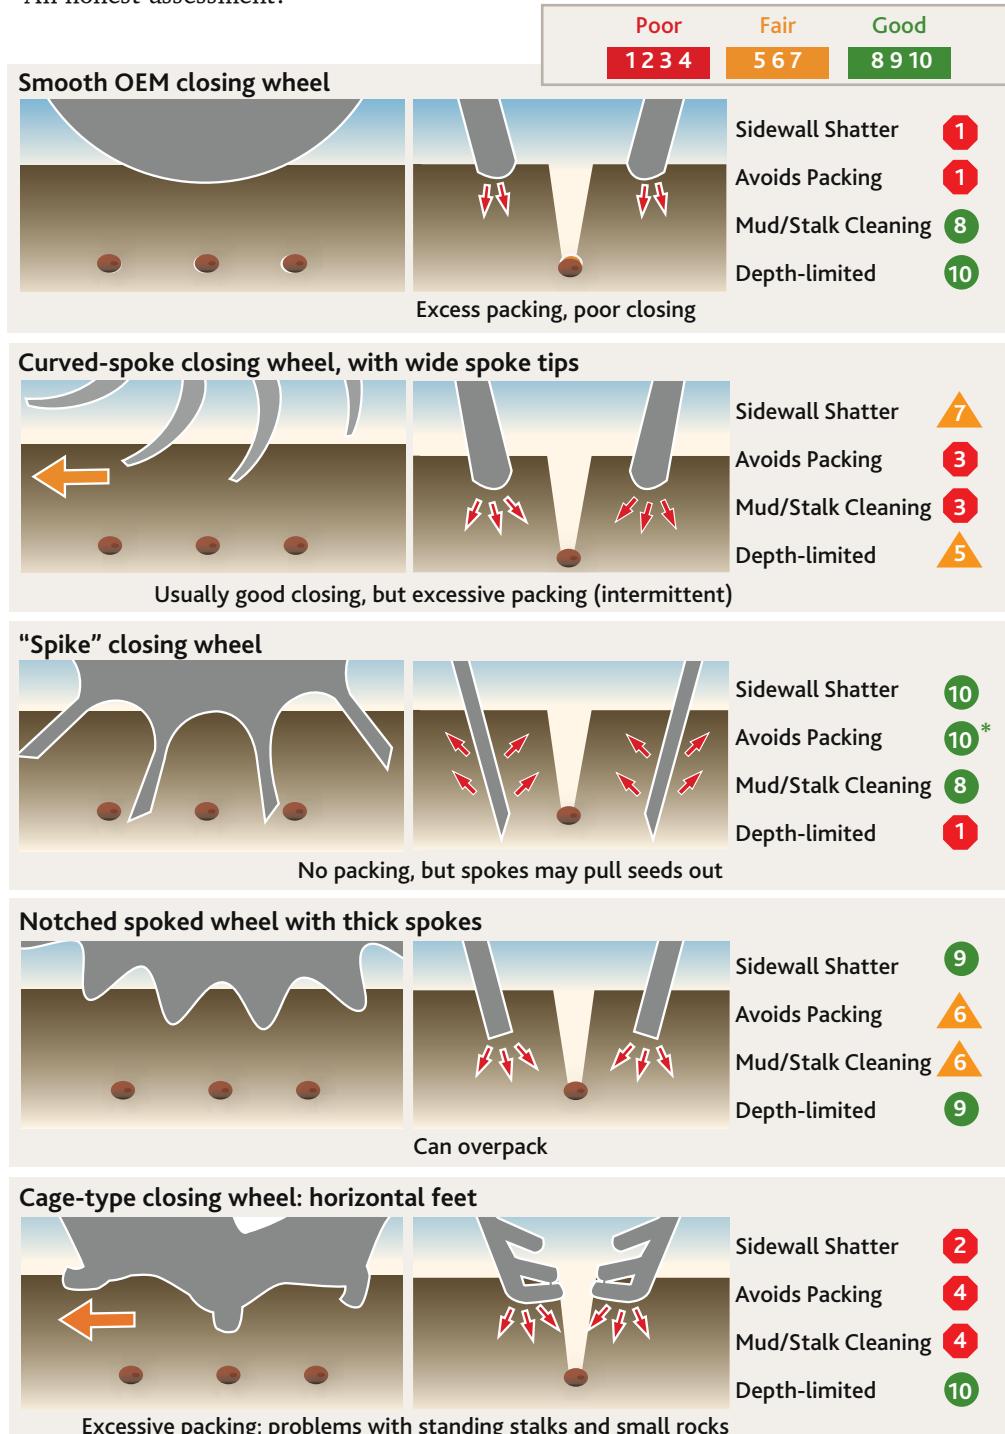

[†]From numerous observations by 3rd-party scientists and farmers.

*Closing wheels that don't pack the soil above the seed (a good thing) shouldn't be used without a separate in-furrow firming device (Keeton seed firmer, Flo-Rite, or seed-lock wheel).

How is the Thompson wheel better?

Before introducing the Thompson wheel in '02, we did a massive amount of testing to arrive at this particular combination of design features. The result: Dramatically improved performance. The thin spokes allow easy soil entry, for excellent **crumbling of the sidewall**. The thinness also **reduces mud accumulation**. The blunt spoke tip, tapering sides of the spoke, and optimal spoke spacing further enhance sidewall shattering, but with **self-limiting depth**. Plus, the Thompson wheel **avoids the pitfall of excessive weight**—when conditions are damp, too much packing over the seed can be hazardous to your crop.

Also, the Thompson wheel has proven durability: High-carbon steel, a truly robust bearing with a triple-lip seal, and our exclusive steel shroud for superior bearing protection—plus, our **5-year warranty** on the bearing.

“I tried 2 rows of Thompson wheels and wedges, and the rest of the planter was [competitor] spike closing wheels. When I did stand counts, the two rows with Thompson wheels had 1,000 – 2,000 higher final populations than the other rows. It was easy to see which rows had the Thompson wheels.” [Four years later, Thompsons & Mojos on all rows] “I think I have the best stands around of corn-on-corn in no-till.”

Steve Litwiller, Parnell, IA
Exapta customer since '08
(Thompsons, toe-out,
Mojos on Kinze 3200)




“Your products help me make money. I did a trial with different spoked closing wheels and yours were by far the best wheels I've seen. I have Thompsons on my 16-row JD planter and am converting my 750 drill to them. They really make a difference in covering the seed and emergence. They break up the sidewall compaction and do a great job closing the seed trench. I appreciate you guys.”

Dave Meyer, Arcanum, OH
Exapta customer since 2014
(T-wheels, toe-out, Valions, Mojos
on 16-row JD 1760 XP planter)



Thompson wheel

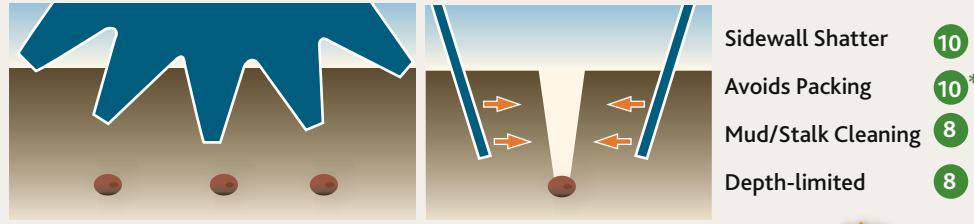

- Aggressive furrow closing with self-limiting depth
- Creates ideal zone for crop emergence & rooting
- Heavy-duty bearing with 5-yr guarantee
- Low mud and stalk accumulation

US Patent No 6,907,833




T2z & T3z wheel (with metric or 5/8" bearing) \$115 each

New 'z'-series is made from military-grade armor plating, for even longer wear life. Fits most JD, Kinze, AGCO White, Great Plains and Monosem planters

Toe-out for closing wheels (planters)

'Toe-out' means the front edge of the wheel tracks a bit wider than the rear: Our wedge creates up to a 6-degree toe-out on planter closing brackets, which have zero initially (planters running 'nose-down' actually have toe-in, resulting in no closing action at all). Toe-out causes closing wheels (all types) to more actively engage and pull soil back into the furrow—the reverse of the opener blades prying soil apart to create the furrow. (Note: JD 50/60/90-series drills have toe-out built into the closing arms.) The need for toe-out is greater in high-clay, low-OM

soils, or in soddy conditions. Exapta's toe-out wedges simply slip onto the bolt attaching the closing wheel on most planter models.

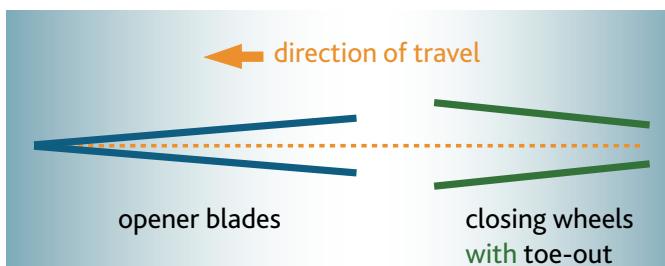

"I've used the Thompson wheels and toe-out wedges for about five years. I've found them to be far superior to any other closing systems I have tried. They're very versatile in the fact that they don't wrap in tall cover crops like green cereal rye, and will close in hay sod where the furrow wants to open back up. Thompson wheels also shatter the sidewall, helping to reduce sidewall compaction in less-than-perfect conditions in corn or soybean stubble. They also work well in varying soil and moisture conditions in the same field. I would recommend the Thompson wheels to anyone who wants to improve their soil by using cover crops and no-till."



Chris Broyan, Berwick, PA • Exapta customer since '09
(T-whls & toe-out wedges on 12-row JD 1770)

"I first tried Thompson wheels after running [competitor 'spikes'] several years. The Thompson wheels pull the soil in very nice and closed the trench. I have the toe-out wedges set at 3 degrees and had some mud adhesion, but didn't hurt the closing job at all. I've really liked them! I also took off the wavy coulters like Exapta recommends and added Thompsons to the entire planter. This season I had the most uniform emergence ever."



Eric Brooks, New Marshfield, OH
Exapta customer since 2014
(T-whls on 12-row Kinze 3000-series planter)

"I'm happy with the Thompson closing wheels and toe-out wedges—the best results I've seen versus other brands."


Olie Leimer, Albert City, IA
Exapta customer since '09
(T-whls on 12-row JD 7100 planter)



Toe-out wedge

JD 1700 (all), White 6000 thru 9000;
Kinze 3000 & 4000 closing brackets

\$5.50 each

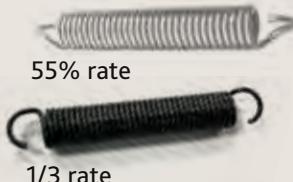


Closing bracket spring

(Replaces OEM heavy spring) Since spoked closing wheels have a much smaller footprint on the soil, a lighter spring is useful on the closing bracket. Our medium 55% spring is for tougher soils (low OM, eroded, high-clay or sod). The light 33% spring is best in loose soils when ran in 2nd - 4th notch.

\$5.75 each

What about coulters and strip-till?

One popular idea from the early days of no-till was to put some sort of tillage device (e.g., coulters) out in front to make the old-style (tillage-era) planter opener **halfway functional again**. Coulters create many problems, including pulling up mud (which clogs gauge wheels), planting weed seeds, compacting the root zone, creating air pockets, destroying too much stubble over the seed row (think soil crusting & erosion), and increasing horsepower requirements. The tillage occurs immediately ahead of the opener—so in damp soils, the results were mediocre at best.

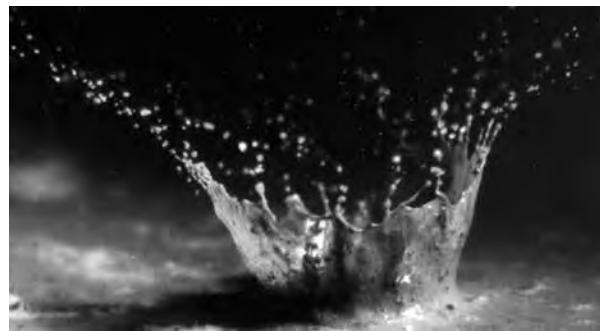

Raindrop impact on bare soil causes crusting. Retaining adequate mulch in the seed row prevents this.

Then the idea was to do tillage earlier so the soils could dry—so **strip-till** became all the rage, despite requiring another trip across the field, owning another piece of equipment, planting even more weed seeds than coulters, creating tremendous seedbed irregularities (clods, air pockets, etc), and causing even more erosion and crusting potential. *However, both coulters & strip-till were using localized tillage merely to address the symptom, rather than the underlying problem—an opener not designed to work in no-till conditions.*



Devastating erosion and loss of stand due to strip till.



This perfect stand in low-disturbance no-till resulted from attention to detail and the use of Keetons & Thompson wheels, with no rain occurring after planting until the 3-leaf stage. If high-vigor seeds are consistently well placed, no rain is required for marvelous stands—every time.

No-till soils already are the ideal seedbed—generally having adequate moisture,* good structure (aggregation) for natural rates of aeration and crop development, a mulch on top, etc.—*if only* our seeders were engineered to handle these conditions. To obtain the full benefits of no-till, dress your planter for success!

*If excess moisture often plagues your no-till seedbeds (muddy planting conditions, poor early growth), consider changing the crop sequence, adding well-chosen cover crops, delaying corn planting by 10-20 days (use an earlier RM corn & thicker population, if need be), running pop-up fertilizer with micros, etc. Use only high-vigor seed (test it! see www.exapta.com/seed-vigor-reap-the-rewards). Pattern tiling may be needed.

Tech tips for gauge-wheel drills:

Some drill opener designs cannot adequately perform Steps 1–4 (see page 3) because they are hangovers from the tillage era. In North America, one design that fulfills Steps 1, 2, 3, & 4 is the John Deere 50, 60 & 90-series single-disc, gauge-wheel opener. Some comments to help them function:

Step 1, Cut: Opener blades should be replaced when half the original bevel is gone (replace OEM at ~ 17.4" diameter). Because the boot is wider than the furrow being cut, it is very difficult to push the boot into the soil. Generally, the lower edge of the boot should be approximately at the soil surface. If attempting to continue running worn blades, move the seed boot to the upper mounting hole (return it to the middle hole when installing new blades).

Step 2, Place: Seed boots should be inspected and maintained—the wear is not obvious from casual inspection. When the bottom outside edge of the boot is no longer straight across, performance is seriously compromised (see photo).

The 60-series drills had a poorly designed seed boot and should be upgraded to the 90-series boot. Maintain leaf springs to keep the boot against the blade. Leaf springs weaken with age, and eventually break.



If boot attachment hole becomes too worn, boot drags out of position, causing more seeds to bounce out of the furrow. There are several attachment-hole repair kits on the market (avoid Pro-Stitch's—they hold the boots too rigid and cause major plugging problems). Maintain or upgrade seed bounce flaps on back of boot: These help keep seeds in the furrow bottom.

The gauge wheel should be firmly on the soil surface during seeding, which holds the sidewall together while the blade exits the soil. Also, for this reason, Reduced Inner Diameter (indented) gauge tires can adversely affect seed placement. Air drills especially may require additional frame ballast (sometimes a lot). Read more at: www.exapta.com/working-knowledge/tech-tips-for-drills.



Inadequate down-pressure causes shallow furrows and more misplaced seeds. The only meaningful indicator of down-pressure is compression of the big coil spring.



Step 3, Firm: Use a good seed-lock wheel, such as Exapta's new DuraLok™ flexible wheel. (The JD firming wheel runs on a rigid, overly wide rim.) Properly shaped firming devices will engage all the seeds and push them securely into the bottom of the furrow, without getting hung up on the sidewall. The flexible DuraLok™ self-aligns for consistently good performance.

Step 4, Close: Close the furrow by shattering the sidewall and pulling loose material into the furrow. Avoid packing soil above the seed.

DuraLok™ Not too narrow, not too wide, not too rigid, not too soft, but just right. Sleek, narrow hub stays clean.

DuraLok™ for JD 50/60/90 & Case SDX drills

Not too narrow, not too wide, not too rigid, not too soft, but just right.

- Narrower to fit the furrow better
- Field proven: highly wear-resistant material
- Top-shelf, custom-built NTN bearings, triple-lip seal
- 3-year warranty on the bearings
- Sleek, narrow hub that's proven to better shed mud, stalks, straw
- 'Tire' won't pull out of the rim

DuraLok™
seed-lock wheel

The sleek shape of the DuraLok™ allows it to stay clean when OEM and competitor (aftermarket) firming wheels are clogging with mud, pulling seeds out, and dragging against the gauge wheel. Even the SDX firming wheel has more problems staying clean than the DuraLok™.

The DuraLok™ has a replaceable bearing. Although our custom-built triple-lip-seal bearing by NTN is so durable you may never need to do so.

The narrow hub sheds mud better because there's more clearance between the hub and the firming arm. Also there aren't bolt heads protruding to snag on vines and straw.



"We used the DuraLoks on 4,800 acres with a 60-ft [Deere 1890] air drill. They worked better than OEM and [competitor aftermarket firming wheel] in wet conditions. The soil did not stick to the DuraLoks as much as to the others."

Scott Arthaud, Keyes, OK
Exapta customer since 2007



DuraLok seed-lock wheel

\$51.50

Deere 50/60/90 upgrade: Ingersoll blades



"I was pleased with the blades. They didn't get the blunt edge like competitor blades tend to, which of course is great for performance. I will continue to use them."

Jordan Reimnitz, Armour, SD • Exapta customer since 2009 (Exapta blades on JD 1860 air drill)



"Your Ingersoll blades were 1/8" larger diameter than JD blades after one season on the same drill."

Tim Willms, Grassy Lake, AB • Exapta customer since '07 (JD 1890 & 1895 drills)



Sharper, Stronger, Proven Technology:

Ingersoll-Canada opener blades are dramatically sharper when new, and stay sharp longer than JD and other aftermarket blades for these drills in northern USA & Canada. JD & other aftermarket blades have dull edges when new, and they only get duller with use, which hinders the cutting of straw and stalks—resulting in hairpinning, as well as poor cutting of the soil itself. Attempting to overcome this requires more down-pressure and frame weight, sometimes a great deal more. Now you can improve this situation considerably with our Ingersoll blades. Same dimensions as OEM.

Ingersoll (Canada) opener blade, JD 50/60/90 drills

\$28.61

Ninja seed-bounce flap for JD 50 & 90 drill boots:

Forward-bending flap keeps more seed in the furrow

The flap on the seed boot is what keeps seeds from bouncing out of the furrow, and this is even more critical on air drills, since the air stream is also trying to escape and may carry seeds along with it. However, JD & aftermarket flap suppliers use a straight flap, made from materials that are too brittle—often snapping off in the field. The issue with straight flaps is that it leaves a triangular gap (see photo) for seeds to escape, and this gap gets larger when the straight flaps bend upward during use, due to riding on the sidewall.



US Patent Pending



Our Ninja flap has a 20-degree forward bend to help close this gap, thus keeping more seeds in the furrow. The forward bend helps deflect seeds downward into the furrow bottom before dust and chunks of sidewall fall in ahead of the seed. The flexible material and tapered end prevent the Ninja flap from riding on the sidewall. The result is better seed placement. Ninjas also shed mud better than OEM and competitors, and proven to have superior wear characteristics.

"The Ninja seed tabs made a huge difference to our seed placement and accuracy—before, we had a lot of seed near and on top of the soil. Also finding we don't need to run the discs as deep to achieve optimum seed depth and placement."

Ben Wilson, Tocumwal, NSW, Australia
Exapta customer since 2015. (JD 1895)

"We've now got 10,000 acres on our Ninja flaps, and they look fine yet—very little wear. They'll easily go another season, unlike the [competitor aftermarket] tabs that needed replacing every season [5,000 acres]."

Darin Brunk & Joe Swanson, Windom, KS • Exapta customers since '99
(Ninjas on 40-ft JD 1890)



Ninja™ flexible seed-bounce flap for JD 50 & 90 drill boots

\$4.63

Is plugging your air drill's primary lines a constant worry?

Problems with seed bouncing or blowing out of the furrow?

A simple solution—installs in just a couple minutes for the entire drill (fits into distribution heads).

SeedVU® gives you the peace of mind of running your fan where it should be, and not worrying about seed blowing out of the furrow, all while monitoring for primary-line blockages.

The SeedVU® takes unwanted, excess primary-line air pressure and separates it from the seed and fertilizer stream, right where you need it to: the distribution head. This allows seed and fertilizer to travel to the openers by gravity, or assisted by an adjustable volume of air. It's up to you!

SeedVU.
Air Drill Venting Unit



"They made [our 1895 air drill] more like a 750 [box drill, gravity-fed] used to be. More seeds in the bottom of the trench."



Mike Arnoldy, Kennebec, SD • Exapta customer since '01
(SeedVUs & Smallaire risers, heads on JD 1895)

SeedVU for air drills

fits late-model JD (plastic heads/"pods"); Case-IH / New-Holland Flexi-coil EZ Flow heads;
Seed Hawk; Salford; Seed Master & other drills updated to Smallaire heads. See p 25 for details.

\$240.00 – 275.00

Mojo Wires for drill Keetons

Most grain drills (except JD 50/60/90s, and some SDX drills) completely lack an *in-furrow* seed-firming mechanism to apply a small but consistent pressure directly onto the seed *at the seed's location* in the bottom of the furrow. Instead, these drills use **trailing packer** or '**press**' **wheels** that run on the soil surface to compress all the soil above the seed to try to obtain sufficient seed/soil contact. As with planters, this method is problematic in the more structured soils of no-till cropping, and often causes **mediocre to poor emergence** if it doesn't rain right away. Hence, many farmers install Keetons on these drills, which help, but often don't have enough pressure.

So we've adapted our highly successful Mojo Wire to fit Keetons for grain drills (the Mojo does require a specially milled Ktn tail from Exapta). By **applying 2x to 5x more pressure onto the Keeton with the Mojo**, the Keeton will wear out faster—but at least it's doing some good at that point! It's important to do consistent seed firming *at the seed's location*—and sometimes this is the difference between achieving a decent stand, or not.

The Mojo Wires are **compatible with the liquid feature** of these drill Keetons,* although the liquid tubing is routed behind the upper receiver, instead of inside. Our specially milled Keetons & Mojos will fit most Sunflower, Crustbuster, Great Plains, Marliss and certain other double-disc drills. The new Case-IH Precision 500 / New Holland P2080-series gauge-wheel drills (which lack an OEM firming device) can use a drill Keeton + Mojo by installing Exapta's steel bracket for this. (* Note: for Case P-500, the Keeton's liquid capability is retained if using Exapta's closing upgrade; otherwise tail is shortened.)



New design!

More pressure, more resistant to bending. Uses our specially milled Keeton. Tab & screw to hold trailing end in position.



Keetons + Mojos greatly enhance Case's Precision-500 drill performance.

Keetons for drills (and GP twin-row planters)
depending on drill brand/model (some contain extra hardware)
Please see our website shopping for all the details

\$27.50 – 35.50

Mojo for drill Keeton

\$12.00

Requires specially-milled Keeton by Exapta

Steel bracket for Keeton on Case P-500 & New Holland P2080-series drills

\$10.75 ea



Thompson closing for gauge-wheel drills

Thompson closing wheels are an excellent upgrade for JD 50, 60, and 90-series drills, and bolt easily onto the original closing arms. The OEM cast closing wheels on the Deere drills have a **ridiculous tendency to hop** because of their weight and smoothness, and the angle of the arm's pivoting, and really hammer the soil when they land after being airborne. Even when running smoothly with low spring pressure, heavy cast closing wheels tend to **seriously over-pack the soil**, reducing emergence and early growth. Thompson wheels completely avoid the problem, since they weigh far less than JD and certain aftermarket wheels, and actively pull themselves into the soil.

“ ‘Wow’...I can testify to the Thompson, as I ran [a comparison of] the Deere stock closing wheel, [OEM with spokes cut into it], [a thicker & heavier competitor spoked steel whl], and Thompsons in no-till and also on some worked [tilled], and the Thompsons shined in both conditions. Guys think that the [thicker competitor] wheel is best because it is heavier and packs more, but that’s not [the closing wheel’s] purpose—I had the worst emergence out of that wheel actually.”



Tanner Vix, Velva, ND • Exapta customer since 2013 (T-wheels on 60' JD 1890 drill)

“I’m no-tilling with a JD 1890 in clay-loam soil. I tend to drive a little fast, 6 - 9 mph. **The OEM closing wheels were in the air probably 50% of the time.** The [competitor spoked wheels] are also heavy and tend also to bounce. I’ve got along best with the Thompsons. I ran all three side-by-side last year [2012], and now have all Thompson wheels on my drill.”



Larry Brunner, Kingsville, MO
Exapta customer since 2012
(Thompson wheels on JD 1890 drill)

“No problems at all with wrapping of cover crops.”

Steve Groff, Holtwood, PA
Exapta customer since ’05 (T-wheels on 1590 drill)



Another drill with a true gauge wheel is the **new Case Precision 500 / New Holland P-2080**. Once you overcome their lack of seed firming by adding a Keeton + Mojo (see p 15), the next order of business is improving the closing action—which is rather pitiful in long-term no-till with their smooth packer wheel. Exapta’s closing bracket is the ideal upgrade in allowing our Thompson T3z to be ran at a 7-degree toe-out, along with lighter spring pressure. **Avoid stand failures! Do firming & closing as separate steps, and do them well.** (T-whls are also a good option for Case SDX drills that have seed-lock wheels installed.)



“We have a customer, 100% no-till, who was ready to return [his Case-IH] P500 until he came across Exapta. The customer later called to say how pleased he was with the Exapta setup. He was able to plant an additional 400 acres of custom work because others weren’t able to close the seed slot [excessively wet]. **His drill is working great because of Exapta products.** We’re pleased with the experience & look forward to recommending Exapta products in the future.”

Scott Messick, of Messick’s Case-IH & New Holland dealership, Elizabethtown, PA



Thompson wheel T4z \$77.00

(with stub shaft, for JD 60 & 90-series drills)

'z' = Tougher than ever, made from military-grade armor plate

Thompson wheel T2z & T3z \$115.00

(with 5/8" or metric bearings, for JD 50-series, Case SDX & Case Precision 500 drills)

Case P-500/NH 2080 closing upgrade \$65.00

For more info, see p 25

Better
than
Ever!

Options for Hydraulic Down-Force



Motorized control valve for in-cab adjustment of any hydraulic system including JD OEM.

Want to change pressure on-the-go? For example, lightening the pressure in soft areas on each pass, or cranking it up in hard areas. Our in-cab manual control switch works great for the OEM rockshaft downforce on JD 50/60/90 drills & 2510H applicators, as well as Exapta's UniForce down-pressure system (see pp 18 – 19). The switch activates a motorized control valve that simply screws into the valve block in place of the knob.

In-cab adjustment for hydraulic systems: UniForce John Deere box drills and 3-section* air drills	\$650.00 \$690.00
--	------------------------------

*Not available for John Deere 5-section air drills
(includes motorized control valve, wiring harnesses, switch box)

Want to *monitor* down-force? Gotcha covered with our system that can monitor any number of openers, from 1 to 54, on JD 60/90 drills & 2510H applicators. Can be used with either the OEM rockshaft downforce or UniForce. Compatible monitors include JD 2600, 2630 or CommandArm (Gen 4), modern AgLeader, or Trimble. A far-too-common mistake we see is not running enough down-force on these drills. Finally, an easy way to know if you're keeping the gauge wheels on the ground continually! No more flying blind. You'll be amazed at how much you'll learn, and how much better you can adjust your drill.



Strain-gauge sensor installed on 90-series opener (highlighted above).

System for monitoring 3 openers*	\$3,490.00
---	-------------------

*Any number of rows up to 54 is possible, call for pricing. *With those rows not over 160 inches from each other. Longer harnesses to connect sensors farther apart may add another \$20-\$100.*

Exapta's UniForce™

Get your JD 50/60/90-series drill to work the way it should.

- Uniform pressure on all openers
- Reduce/eliminate hairpinning
- Get consistent depth!
- Better use of frame weight
- Less sidewall compaction
- Greater upstroke range on openers
- **3-year warranty on cylinders**
(some restrictions apply)

The biggest downfall of the JD 50/60/90 drills & 2510H is how down-force is applied—the rockshaft twists to compress a big coil spring on each opener. Because the spring is nearly parallel to the arm, the opener has almost no down-stroke—i.e., the spring is in the optimum position (applying the correct amount of down-force) for only about 1/4" of its range. Had the spring been oriented differently (e.g., pushing straight down), the problem wouldn't be nearly so bad.

So, you must have fields that are laser level for these openers to work correctly. Even 1/2" depressions give them fits. The spring starts to relax as the opener goes into these minuscule depressions, and you lose down-force—the opener loses depth, and starts hairpinning. To compensate, everyone cranks the pressure way up—so that the majority of openers have far too much pressure, just to keep those passing thru mild depressions working halfway decent. You end up with excessive sidewall compaction on most of the rows, while some aren't even holding depth. Not to mention it takes a bunch of extra ballast on the frame.



UniForce cylinders are made from top-quality materials and have extra packing rings for a very long life.

"Before installing UniForce, the drill openers looked like a piano board being played. Now that UniForce is installed, it is amazing to see how no opener bounce occurs. The entire drill has consistent down-pressure, giving us uniform depth. We are now obtaining what we set out to accomplish.... We had a neighbor that had double-crop beans to be planted after 75 bu/a chopped wheat straw. After seeing our bean stands, he left his drill in the shed and hired us."




David Hoar, Campbellsburg, IN • Exapta customer since 2016
(UniForce on 45-ft JD 1690 CCS)



US Patents Pending

New

The Trouble with OEM Springs

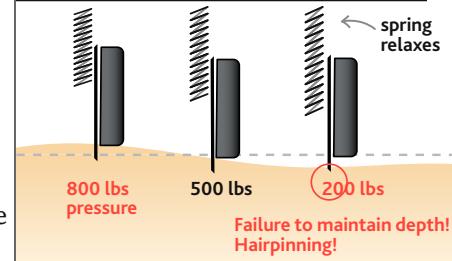

"Last fall [2015] was extremely hard and dry for wheat sowing. I was able to hold the depth much better with the [UniForce] hydraulic system than I would've with the JD springs. We left one opener with the JD spring on it, and it was visibly jumping around [riding out] compared to the rows with hydraulics."



Alan Aufdemberge, Lincoln, KS
Exapta customer since '08
(UniForce on 40-ft JD 1890)

UniForce™

Hydraulic Downpressure

Our UniForce hydraulic system fixes Deere's design debacle. Now, you can get uniform pressure on every single opener throughout its full stroke. The result is much better cutting, less hairpinning, holding depth much more accurately, and far less sidewall compaction. Another problem with springs is that they bounce: Hydraulics don't have this problem. When developing the UniForce, we'd often leave at least one opener with the OEM spring. Watching them run side by side, it's amazing how much the row(s) with OEM springs bounce, whereas the rows with UniForce are smooth and steady.



UniForce uses single-action cylinders along with the OEM rockshaft, which is still used to raise and lower the openers. Both can run on a single tractor remote, or they can be kept entirely separate.

Large 3/4" header hoses* allow oil to move quickly from one end of the drill to the other, and between the front & back ranks. This keeps pressure almost perfectly constant even while going over steep terraces or through swales at high speed. Special brackets support the header hose on most air drill sections. Large 1/2" drop hoses let oil move in & out of cylinders very rapidly. But don't be fooled by the size of the hoses: The flow requirements are relatively low—for 48 rows, the UniForce takes only 4 - 8 GPM (for comparison, the air cart fan needs 25 - 30 GPM). (*Box drills use 1/2" header hoses.)

"In hard, dry bean stubble, [the UniForce] stuck [the wheat seeds] in there better. The stands were more consistent in wheel tracks and drier areas. Overall, slightly more uniform stands, and more uniform emergence."




Mike Arnoldy, Kennebec, SD • Exapta customer since '01
(UniForce on 43-ft JD 1895 & 60-ft JD 1890)

Choose 0% financing for 24 months, or 6.5% cash rebate.

UniForce™ hydraulic down-pressure system
for box drills:
for 3-section air drills:
for 5-section air drills:

\$375/row, plus
\$1,175.00
\$1,920.00
\$2,600.00

Tow-between carts, add \$475 - \$640, depending on cart size

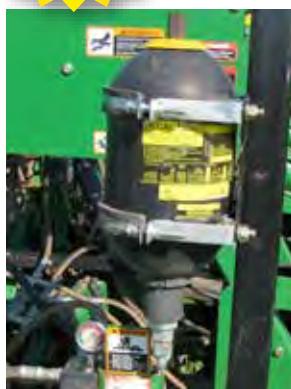

For those who farm in terraces, especially when using only a single rank of openers, Exapta offers an optional 2.5-gallon accumulator for the UniForce system (JD 50/60/90 & 2510H). When hitting terraces square-on, even the largest-capacity tractors can't supply enough oil flow to keep the pressure constant, but our accumulator completely solves this. (If you don't farm in terraces, you don't need an accumulator.)

Optional Accumulator, 2.5 gallon
Includes brackets, hoses, fittings

\$2,290.00

Intelligent Ag Wireless Blockage & Flow Monitor

Be proactive — catch drill problems while they're happening! If you've ever been sickened to find out your drill wasn't seeding or fertilizing for part of each swath across a field, or the entire season, you know firsthand why monitoring product flow is so important.

On air drills, the OEM pin-style or optic sensors only tell you if something is flowing past, not whether it's full flow or not. Using *acoustics*, Intelligent Ag's sensor system tells you the rate each primary is getting (as a % of full-flow), so you know right away if either fertilizer or seed stop flowing, or are flowing intermittently, or at a partial rate. **No more skips!**

The system works on box drills too, many of which have no flow sensors at all. The sensors are quite durable, many of which are still going after 180,000 acres.



1. As the seed leaves the manifold, it passes through the acoustic sensor.



2. The seed impacts a stainless steel membrane, creating a small pulse of sound that travels out through an auditory tube. These pulses are collected by the electronic control unit (ECU), which relays information wirelessly to the cab.



3. Information arrives via WiFi and gets displayed on an Apple iPad.
Red = blocked secondary.
Orange = primary has flow above or below parameters you set.



**0% Financing
for 12 months available**

(1/3 down, 1/3 in 6 months, final 1/3 at 12 months)



Intelligent Ag monitoring system

for 48-rows, 6 primaries, TBH cart \$7,354.00

*TBT cart, add \$45.

(iPad not included)

Any number of rows up to 156 is possible, and 20 primaries.
Box drills: Call for info.

Shop for Exapta products online



Valion (chrome alloy) for Kinze 3000-series

\$23.50

#V.300. Easy to install, great wear-life.

User-friendly hex-head bolts included (no more allen-heads!)

For more info on Valions, see p 5.



Valion Ultra (tungsten carbide) for Kinze 4900

\$73.00

New



Valion (chrome alloy) for Deere XP, ME5

\$30.50

#V.450. (Not compatible with ExactEmerge's brush-belt tube) Twist-on style.
For more info on Valions, see p 5.



Valion Ultra (tungsten carbide) for Deere XP, ME5

\$73.00

#V.500. (Not compatible with ExactEmerge's brush-belt tube) Twist-on style.
For more info on Valions, see p 5.

US Patent No 8,978,564



Valion (chrome alloy) for pre-XP and Kinze 2000s

\$35.50

#V.150. 'Bolt-on,' for JD 7000, 7200, & heavy-duty welded shank on 1700s ('03 & '04). For more info on Valions, see p 5.

Also available with oversize bolt, rivet & bushings for shank holes that've been drilled out: #V.153.

US Patent No 8,978,564



Valion Ultra (tungsten carbide), pre-XP & Kinze 2000s

\$78.00

#V.200. 'Bolt-on,' for JD 7000, 7200, & heavy-duty welded shank on 1700s ('03 & '04). For more info on Valions, see p 5.

Also available with oversize bolt, rivet & bushings for shank holes that've been drilled out: #V.203.



Rivet tool

\$60.00

With wide die (bit), makes crimping the rivet easier on Valion "bolt-on" installs.



L.433 stainless tube holder

\$26.00

For use in applying liquids in-furrow thru Valions on JD 7200 & all 1700-series, except ExactEmerge brush-belt tube.




L.133 stainless tube holder

\$26.00

For use in applying liquids in-furrow thru Valions on JD 7000 & Kinze 2000. (Not for Kinze 3000-series) Tubing not included.

L.144 for Kinze 4900

\$26.00



Heat-resistant tubing w/ beveled end

\$3.85

For use with Valions, 21", 1/4" OD. Beveled end for easier insertion through Valion. Special high-temp semi-rigid plastic.

Also available in 28" length for \$5.21. 28" puts connector above shank; 21" is alongside. (see photos on main Valion web page)



Mur-lok Quick Connect, auto-lock

\$1.95

#L.2200. Union connector for 1/4" OD tubing, push ring to release

Shop for Exapta products online



Keeton, Quick Attach: Tail \$20.00, Bracket \$15.00
The only Keeton model that fits JD Max-Emerge 5 w/ ExactEmerge brush-belt tube, and the best choice for Kinze 4900. The Quick Attach also fits JD 7000 thru XP, White 9000s, and Kinze 2000s & 3000s. QA tails in 2016 had some problems; much better design for 2017. QA brackets are much sturdier and easier to install than the Universals. Single liquid tube goes all the way through tail.



Keeton, dual-tube w/ Universal bracket \$34.00
#KTN115011 The Universal Bracket fits Deere 7000s thru Max-Emerge 5 (except ExactEmerge), Kinze 2000s, White 6000s – 9000s, & some Kinze 3000s (non-EdgeVac, prior to 2013). Two liquid application tubes for split or high-volume applications. (Kinze EdgeVac & all 2013 & newer models need Scraper-Mount bracket instead—see below). **Brackets now pre-cut by Exapta for full Mojo compatibility & fast install.** Also available with Dry tails.



Keeton, dual-tube, 'Kinze Gold' Scraper-Mount brkt \$34.00
#KTN115014 For all Kinze 3000-series (including 2013 & later) row units, using the scraper mounting holes (not compatible w/ rotary scrapers, nor Air Design). New design (no more hole-drilling for EdgeVacs).



Keeton, dual-tube replacement tail \$29.00
#KTN115013 Replacement tail only, for Universal bracket, or Scraper-Mount bracket. Two liquid application tubes. 'Dry' tails also available (same price).



Liquid tube holster \$4.50
#L.501 For external routing of liquid tube on Keeton Universal & Scraper-Mount brackets. See p 7, and our instruction sheet at www.exapta.com/instructions. Recommended with K.211 Mojos.



Mojo Wire kit, Dry Keeton tails for Universal & Scraper-Mount (\$planters) #K.212
Streamlined for better residue flow.



Mojo Wire kit, Liquid Keeton tails for Universal & Scraper-Mount #K.211
Fits dual-tube tails *Do not use on Low-Profile tails.*



Mojo Wire kit, Liquid, for "Quick Attach" Keeton K.311 Use this kit when applying liquids via the Ktn.
New design for 2017 not field-tested. Available late March.



Mojo Wire kit, Dry, for "Quick Attach" Keeton. K.312 Doesn't use liquid feature of Ktn. New design for 2017 not field-tested.



Mojo Wire kit, fits planter Flo-Rite for Universal & Scraper-Mount Brackets (WaveVision-ready) #K.215

Shop for Exapta products online

For these items *and more*, visit www.exapta.com

US Patent No 6,907,833



T2z & T3z wheel (metric or 5/8" sleeve/shroud) \$115.00

Fits most JD, Kinze, AGCO White, and Great Plains planters.

Also fits JD 50-series drills; Case SDX (with seed-lock wheels); and Case Precision 500 drill using special bracket & torsion spring from Exapta—see pp 16 & 24. Includes snap-ring & bearing (installed), steel shroud, dustcap, bearing sleeve. For more info on T-wheels, see pp 9 and 16. Five-year warranty on bearings.



Toe-out wedge for closing wheels \$5.50 ea

For JD 1700 (all), White 6000 thru 9000, Kinze 3000 & 4000 closing brackets. For more info on toe-out, see p 10.



Closing bracket spring \$5.75 ea


(Replaces OEM heavy spring) Since spoked closing wheels have a much smaller footprint on the soil, a lighter spring is useful on the closing bracket. Our medium spring (#M.4466) is for tougher soils (low OM, eroded, high-clay or sod). Stouter than our old 1/3-rate spring, M4433.



Complete closing upgrade for planters \$246.75

Fits most JD, Kinze, AGCO White, and Great Plains planters.

Includes 2 Thompson wheels (T2z or T3z: metric or 5/8" sleeve/shroud) 2 wedges, and a medium closing spring.

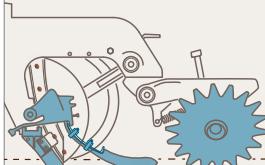

Complete row-unit upgrade, planters \$317.25 – \$401.91

Exact price depends on planter model and options selected. Includes Valion, Keeton, Mojo, and the Complete T-wheel closing upgrade (see above).



Replacement hub/star \$85.50

#M.4501z. For T2 or T3 owners, this hub/star (with bearing and snap-ring installed) is a replacement for worn-out wheels. Doesn't include shroud, sleeve, or dustcap.



Closing bracket & T-handle \$54.16

PLT120730, # PLT120740. Updates JD 7000, 7200 to bolt-on closing wheel configuration. Spring not included. Also available in black.



Gauge-wheel bearing \$8.75

M.4887. KYY double-row ball bearing: fits gauge wheels on many planters (JD '92 & newer, Kinze '93 & newer, White 6000-9000), gauge wheels on drills (JD 50/60/90 & Case P-500), and closing arm on JD 60 & 90-series drills.

Shop for Exapta products online



Down-force monitoring system

To monitor 3 openers (monitor not included)

\$3,490.00

For all JD 60/90 drills & JD 2510H applicators. Must have one of the following monitors: JD 2600, 2630, CommandARM (Gen 4), modern AgLeader or Trimble. Can monitor any number of openers up to 54. Price depends on # of rows and distance between them (longer cables cost slightly more) See p 17.

New



In-cab adjustment of hydraulic down-pressure

for UniForce (on any JD 50/60/90 drill)

\$650.00

John Deere box drills and 3-section air drills

\$690.00

For Deere drills (OEM downforce, except John Deere 5-section air drills), 2510H (OEM downforce), or UniForce. Includes motorized control valve, wiring harnesses, switch box.



Ingersoll-Canada opener blade, JD 50/60/90 drills

\$28.61

J.5069. Dramatically sharper when new, and stay sharp longer than JD and aftermarket blades for these drills in northern USA & Canada. Proven technology, proven durability. Exapta brings you only the very highest quality. Same dimensions as OEM. See p 13 for more information.



Leaf Spring for seed boot on JD 50/60/90 drills

\$5.25

M.4714. Manufactured to Exapta's high-quality specs for longer service life (less breakage, maintains strength) and 20% more force applied to the boot. Special ultra-durable paint process prevents rust. Plus a splotch of blue for visibility.

"Exapta seed boot springs are absolutely brilliant."

—Tom Robinson, Hoyleton, South Australia



Ninja™ flexible seed-bounce flap, JD 50 & 90 drill boots

\$4.63

#M.4708. Unique forward bend to put more seeds in the bottom of the furrow. Superior wear life; doesn't break off like OEM and aftermarket flaps. Fits Standard and Extended Wear boots. See p 14 for details.



DuraLok™ seed-lock wheel

\$51.50

Fits JD 50/60/90 drills and Case's SDX. Narrow, sleek hub to shed mud better than OEM & aftermarket firming wheels w/ wide brgs/hubs. DuraLok™ is much like the SDX firming wheel, but narrower, less than half the price, and with a replaceable bearing! Although our custom-built triple-lip-seal bearing by NTN is so durable you may never need to do so. 3-yr warranty on bearings. Wheel dimensions are 0.45" x 9".



Keeton for grain drills

\$27.50 - 35.50

Modern 2-piece design with replaceable tail. Various bracket models to fit most Sunflower, Great Plains, Crustbuster, Tye, Marliss, and other drills. Also fits Case Precision 500 using special Exapta bracket (see below). Also fits GP twin-row planters. Mojos highly recommended—use our milled version of tail.



Mojo Wire for drill Keeton

\$12.00

K.608. Fits 2-piece drill Keetons that have milled tops by Exapta. For Case P-500/NH 2080, other drills, GP twin-row planters. For more info on Mojo Wires for drills, see p 15.



Steel bracket, Keeton on Case P-500/NH 2080 drill

\$10.75

#C.101L/R. For more info, see p 15.

(each)

Shop for Exapta products online

For these items *and more*, visit www.exapta.com.

Now optimized for smartphones & tablets, plus major overhauls to make online shopping much easier.



Thompson wheel T4z

\$77.00

With stub shaft, for JD 60 & 90-series drills. New 'z'-series is made from military-grade armor plating, for even longer wear life than our previous x-series. For more info, see p 16.



Thompson wheel T2z & T3z

\$115.00

(with 5/8" or metric bearings, for JD 50-series, Case SDX & Case Precision 500 drills)



Bracket kit for T-wheels, Case P-500/NH 2080 drill

\$65.00

*#C.201L/R. Bracket to hold Thompson wheels at correct position & angle (creates 7° toe-out) to replace packer wheel. For use only in conjunction with Keetons (see p 15), since the T-wheel does no packing. Also included is a lighter torsion spring for the closing arm. Easy installation. **The only closing option for these drills that allows full-length liquid Keetons to be used.***



Coil spring, for boot/scraper on CIH P-500 / NH 2080

\$5.81

#C.4300. 25% more force than OEM to reduce straw tucking between boot & blade. Special ultra-durable paint process prevents rust.



SeedVU for late-model Deere air drills

\$275.00


Venting unit, fits into top of JD distributor head (divider/"pod"/manifold) in place of OEM plastic twist-on lid. (Doesn't fit older JD head with metal lid, long J-bolt, and wing nut – but those old heads should be upgraded anyway; you'll find a lot more convenient access & less plugging by getting rid of the J-bolt, and less seed damage & smoother product flow). Not recommended for 50' & 60' 1890s. See p 14 for details.



SeedVU, Case-IH / NH Flexi-coil ('EZ Flow' head)

\$250.00

Diffuser / venting unit, fits all New Holland / Flexi-coil air drills built in the past 15+ years in North America, and most modern CIH air drills. See p 14 for details.



SeedVU, for Smallaire distribution head

\$240.00

2015 & newer SeedMaster drills; older Amity drills; and other drills converted to Smallaire heads (see below). See p 14 for more information.



SeedVU, for Seed Hawk, Salford drills (Raycol head)

\$250.00

Also available for late-model Amity/AGCO Sunflower drills

\$260.00



Smallaire conversion head 12 outlets

\$230.00

6 outlets

\$173.00

Other outlet numbers available, from 3 to 16—see website or call for pricing. Upgrade to use SeedVU on other drills (older Deeres with steel heads/pods, etc.) Zinc-plated. Powder-coat paint. Top-shelf product. Smallaire is an Aussie company, and these folks know their air flow.



Smallaire riser pipe

2.5-inch

\$95.00

Also available in stainless steel, \$110.00. Other sizes available.

If you need taller pipes to improve gravity flow thru the secondaries, or just looking to replace rusted-out pipes or older pipes that lack dimples & enlarged elbows to distribute seed & fertilizer more uniformly as it goes up into head.

We're here to help

Confused yet? Not sure where to start? Feeling intimidated? Relax, we can help. From thousands of hours spent methodically adjusting and examining seed placement, Exapta has created the **No-till Seed Explained™ DVD** (see p 27) to help you along each step of the way. And our 2016 **Seeding School DVD** is available for additional learning.

We encourage you to **keep in mind Steps 1 – 4** (p 3) for the most effective no-till stand establishment. We encourage a systems approach, not all that different from the drivetrain on a truck or tractor. Which piece can be neglected? None. If you only replace the tires on the truck, but don't take care of the engine, you will have a lot of issues. Exapta products complement each other, giving you the advantage of the System. One part may not give you all the results you are hoping for. While the components of a truck or tractor were engineered to work together across a range of conditions, your seeding equipment was designed for *tilled* seedbeds. Which is why there is a need for modifications.

More questions? Instructions for all of our products can be found on our website. Or give us a call! Our knowledgeable crew serves up only straight answers, and **can walk you through which items to tackle first**—even if it's not our product. Our mission is to make sure you have the equipment and know-how for ultimate success in no-till seeding on your farm. For further reading, check out our free newsletters at exapta.com/newsletters. Our website is now optimized for smartphones and tablets, plus major overhauls to make online shopping much easier.



“Great products that are field-tested, and knowledgeable support.”

Steve Groff,
Cedar Meadow Farm,
Holtwood, PA
Exapta customer since '05



“I was the only one able to plant this year because of your theories: Remove the coulter, use the Valion—with a wider seed trench and using the Keeton plus Mojo Wire for seed firming. Everyone else using coulters created a huge mud mess.”

Scott Lambert, Trempealeau, WI • Exapta customer since 2013

“We installed Valions, Mojos, and Thompson wheels last year and our stands were substantially better. In the past, we were having a hard time getting the stands and yields that we wanted, but now we are doing better than we ever have. **The DVD was also money well spent.** It helped us a lot to understand the importance of getting the planter and drill set up correctly. You guys provide great products & service.”

James Snellen, Hodgenville, KY • Exapta customer since 2014

2016 No-till Seeding School DVD


\$85.00

For those who missed out on the school, here's the full 3-hour DVD. Learn simple, easy adjustments that often provide enormous improvement. An array of adjustments & attachments on planters & drills shown in action. Inspection of corn stands planted a couple weeks prior with the same configurations. Clear explanation of the interactions amongst the components of planters & drills. Suggested: Watch/review our No-till Seeding Explained DVD first.

No-till Seeding Explained™ DVD

2014 edition includes 5 years worth of updates!

- Discussion of what the components & attachments should be doing (or not)
- Any fertilizer with the drill or planter? Where, why, how, and the trade-offs
- 'Preparing' the seedbed at harvest of previous crop
- Carefully chosen photos, diagrams, & video clips
- (Revised/expanded) printed troubleshooting guide for in-field use
- No sales pitches, purely educational

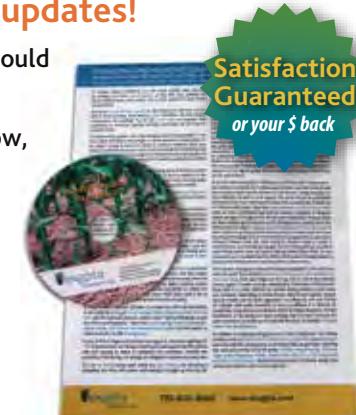



**Satisfaction
Guaranteed
or your \$ back**

"Thank you for creating this wonderful DVD. It's the best \$65 I've ever spent in farming. I've never seen anything like it, certainly not in Australia, and not from the U.S. either."

—Fraser Pogue, Ardmona, Victoria, Australia

The 2014 Edition surpasses the '09 Edition in clarifying the original message, as well as exploring more recent technology and how it may fit your operation.

Narrated by the calm, reassuring voice of Ken Root, from a carefully honed script by Matt Hagny, this DVD is aimed at nurturing your understanding of the seed-installation process. We have tried in the utmost to be truthful and objective, and to deliver highly useful insights and tips. We sincerely want no-tillers to succeed, whether they buy any hardware from Exapta or not. (Our products are mentioned very briefly among a wider discussion of aftermarket suppliers & products.) Detailed narrative & visuals to guide you through everything from off-season overhauls of your planter & drill, to exact step-by-step adjustments in the field. Actual footage of Matt Hagny excavating seeds in furrows (both planters & drills); discussion of what good seed placement looks like, and why. Troubleshooting. Maintenance tips. Aftermarket upgrades. Seed vigor. Root growth. How uniform timing of emergence far outweighs uniform spacing for yield influence. For highly effective no-till seeding, this DVD has it covered.

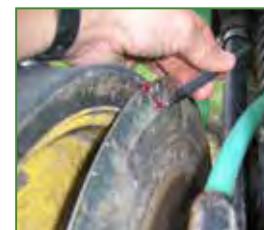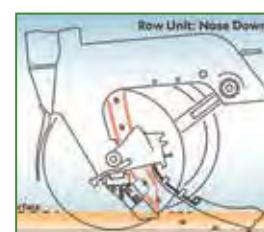

No-till Seeding Explained™ DVD 2014 Edition


\$65.00

While we cover no-till seeding in the broadest possible terms, specific recommendations given will apply primarily to the JD/Kinze/White planter design, and to the Deere 50/60/90-series single-disc gauge-wheel drills. Case SDX & Case Precision 500 / NH 2080 gauge-wheel drills are also discussed. (Once you see the explanation of the discrete actions required for proper no-till seed placement, you'll understand why we focus on certain models as being the top choices for no-till seeding in North America. Even if you do not yet own these seeder models, you will benefit from understanding no-till seeding better as explained in this comprehensive DVD.) Includes laminated 10-step guide.

PRST STD
US POSTAGE
PAID
DENVER, CO
PERMIT NO. 631



'Quick Attach' Keetons + Mojo Wires for good firming, every time.

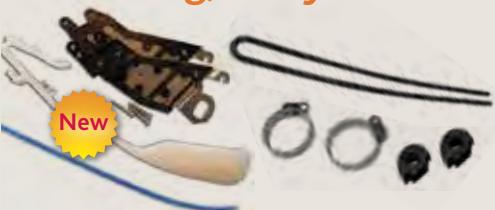

Solves most of the clunkiness of previous designs, including Universal!

See p 22.


US Patents Pending
Prices subject to change. Copyright 2017 Exapta Solutions, Inc. All rights reserved.



UniForce Hydraulic Down-pressure system

See pp 18 - 19.

No more guessing. Monitor your drill's down-force.

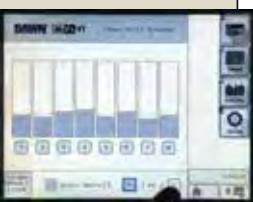

See p 17.



Everyone's talking about the huge advantages of chrome Valions!

As if that wasn't good enough, we took the concept to the extreme with our Ultras:

Tungsten carbide inserts
for a permanent fix!



See page 5 for details.



% Flow Monitoring using Acoustics

See p 20.

Ninja flexible seed-bounce flaps Get more seeds into the bottom of the furrow.



See p 14.

Call today: 785-820-8000

(Mon-Fri 8AM-5PM CST)

Order online: exapta.com

Questions? Give us a shout. We serve up only straight answers.

